

Agile

5/8" Portable Stud Welder

- Single phase 115VAC Input
- < 60lbs weight
- 5/8" welding



Specifications

Weld Rate

Stud Size	Amps	Seconds	Welds /Min Standard Unit	Welds /Min HD Unit
5/8"	1200	0.67	3	6
1/2"	800	0.55	5	11
3/8p"	550	0.33	14	27
1/4"	450	0.17	30	66
3/16"	300	0.15	55	100

Input Power


Standard Unit	HD Unit
90-265VAC single phase 15A @ 115VAC 8.5A @ 230VAC	90-265VAC single phase 16A @ 230VAC

Mechanical

Weight: 58 lbs

Storage Conditions: -20°C – 65°C

Operating Conditions: 0°C – 40°C

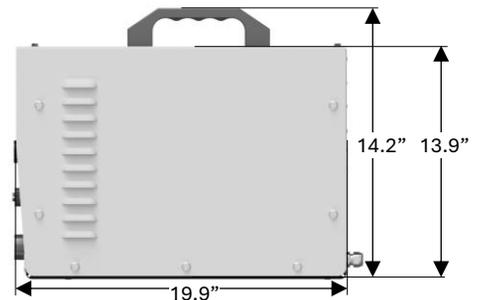

Part Numbers

Part Number	Control Connector	Weld Connector	Rating	Plug	Automated Interface	Servo
GT1048-800	4-pin Amphenol	Dinse	Standard Duty	115V	No	No
GT1048-801	2-pin Hubbel	Dinse	Standard Duty	115V	No	No
GT1048-801	2-pin Hubbel	Dinse	Heavy Duty	230V	No	No
GT1048-802	R&S	Camloc	Heavy Duty	230V	No	No
GT1048-804	10-pin Circular	Dinse	Standard Duty	115V	No	Yes
GT1048-805	24-pin Circular	Dinse	Standard Duty	115V	Yes	No

Contact us for customizations